


# Oilless Bushings


## Flanged Bushings



**FOB**

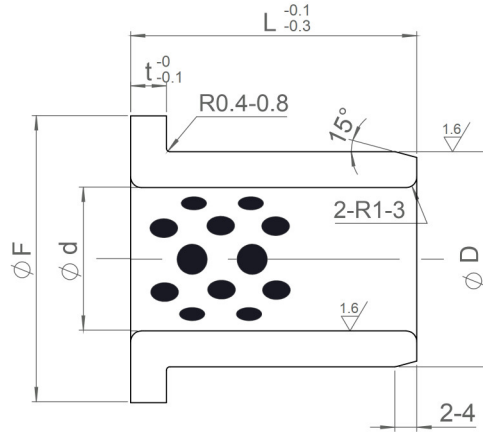

Direction of Motion  
(Sliding Motion)



■ **Materials**

SP : #500SP(CAC304+Graphite)

d		D		L						F	t		
5	+0.032	9	+0.028	10	12					14	2		
6	+0.020	10	+0.019	10	12	15				16			
8	+0.040	12	+0.034 +0.023	10	12	15	20			20	3		
10	+0.025	14		10	12	15	20	25	30	22			
12	+0.050 +0.032	18	+0.041 +0.028	10	12	15	20	25	30	25	5		
13		19		10	12	15	17	20	25	30		26	
14		20			15	20	25	30				27	
15		21		10	12	15	20	25	30			28	
16	+0.061 +0.040	22	+0.050 +0.034	12	15	20	25	30	35	40	29	7.5	
18		24			15	20	25	30	35	40	32		
20		30			15	20	25	30	35	40	40		
25		35			15	20	25	30	35	40	50		45
30	+0.075 +0.050	40	+0.060 +0.041		20	25	30	35	40	50	50	10	
31.5					20	25	30	35	40	50			
35		45			20	25	30	35	40	50	60		
40		50			20	25	30	35	40	50	65		
45	+0.090 +0.060	55	+0.073 +0.051		20	25	30	35	40	50	60	10	
50		60			20	25	30	35	40	50	60		
55		65				30	35	40		60	80		
60		75		+0.062 +0.043		30	35	40	50	60	80		90
70	+0.107 +0.072	85	+0.076 +0.054					50	60	80	105	10	
75		90							60	80	110		
80		100								60	80		100
90		110								60	80		100
100	+0.088 +0.063	120	+0.088 +0.063						80	100	150	10	
120		140								80	100		170



Product Code - d × D × L

Example) FOB - 18 × 24 × 30