


ROD Anticorrosive Shaft

Material : S45C

Treatment : Ground, chromium plated and polished

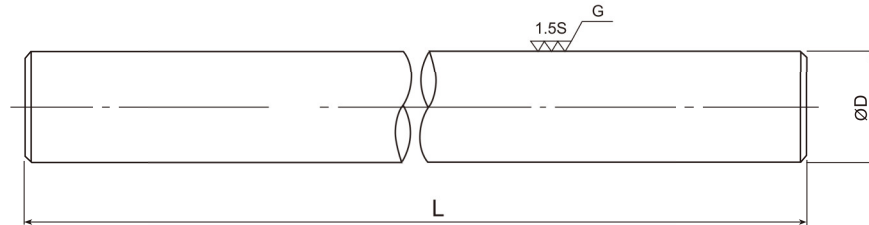

Diameter D	Model No.	Diameter tolerance μm	Max. Length	Weight	Diameter D
mm	ROD	f8	L mm	kg/m	mm
4	ROD 4	-10 -28	3000	0.10	4
5	ROD 5		3000	0.15	5
6	ROD 6		4000	0.22	6
8	ROD 8	-13 -35	4000	0.40	8
10	ROD 10		4000	0.62	10
12	ROD 12	-16 -43	4000	0.89	12
14	ROD 14		4000	1.21	14
15	ROD 15		4000	1.39	15
16	ROD 16		4000	1.58	16
18	ROD 18		4000	2.00	18
20	ROD 20		4000	2.47	20
22	ROD 22	-20 -53	4000	3.00	22
25	ROD 25		4000	3.85	25
28	ROD 28		4000	4.84	28
30	ROD 30		4000	5.55	30
32	ROD 32	-25 -64	4000	6.32	32
35	ROD 35		4000	7.55	35
36	ROD 36		4000	8.00	36
38	ROD 38		4000	8.91	38
40	ROD 40		4000	9.87	40
45	ROD 45		4000	12.49	45
50	ROD 50	-30 -76	4000	15.41	50
55	ROD 55		4000	18.65	55
56	ROD 56		4000	19.34	56
60	ROD 60		4000	22.20	60
63	ROD 63		4000	24.48	63
65	ROD 65		4000	26.05	65
70	ROD 70		4000	30.21	70
75	ROD 75		4000	34.68	75
80	ROD 80	-36 -90	4000	39.46	80
85	ROD 85		4000	44.56	85
90	ROD 90		4000	49.94	90
95	ROD 95		4000	55.66	95
100	ROD 100		4000	61.66	100